




Structural Blind Rivets


Manufacturer: RivetFast

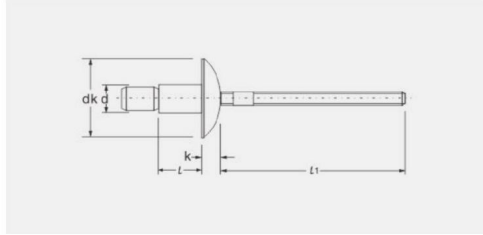

Materials

Body	Aluminum Alloy
Body	Stainless Steel
Body	Steel

d	l +0.99	dk	Hole	Min. Grip	Max. Grip	K (k2)	L1	Minimum Tensile Strength (N)		Minimum shear Strength (N)	
								Steel	Aluminum Alloy	Steel	Aluminum Alloy
Φ4.8±0.09	10	Φ9.5±0.29	Φ5.0~Φ5.2	1.5	6.5	2.4	27	4800	2220	6000	2800
Φ4.8±0.09	14	Φ9.5±0.29	Φ5.0~Φ5.2	1.5	11.0	2.4	27	4800	2220	6000	2800
Φ6.4±0.11	14	Φ13.0±0.35	Φ6.7~Φ6.9	2.0	9.5	3.0	27	9120	3960	10500	5400
Φ6.4±0.11	20	Φ13.0±0.35	Φ6.7~Φ6.9	2.0	16.0	3.0	27	9120	3960	10500	5400

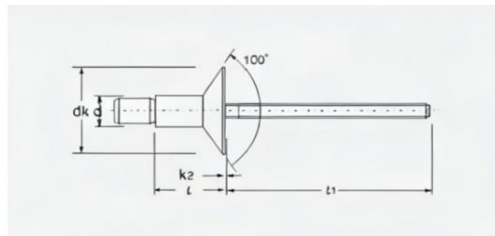

Materials

Body	Aluminum Alloy
Body	Stainless Steel
Body	Steel

d	l +0.99	dk	Hole	Grip Min	Grip Max	K (k2)	L1	Minimum Tensile Strength (N)		Minimum shear Strength (N)	
								Steel	Aluminum Alloy	Steel	Aluminum Alloy
Φ4.8±0.09	12	Φ9.5±0.29	Φ5.0~Φ5.2	3.5	8.0	2	27	4800	2220	6000	2800
Φ4.8±0.09	16	Φ9.5±0.29	Φ5.0~Φ5.2	3.5	12.5	2	27	4800	2220	6000	2800
Φ6.4±0.11	16	Φ13.0±0.35	Φ6.7~Φ6.9	5.0	11.0	2.2	27	9120	3960	10500	5400
Φ6.4±0.11	22	Φ13.0±0.35	Φ6.7~Φ6.9	5.0	17.5	2.2	27	9120	3960	10500	5400